

PALAX ACTIVE

NEW!


PALAX[®]

For active production of firewood

The user-friendly PALAX ACTIVE firewood processor enables owners to produce firewood more efficiently, effortlessly and easily without forgetting one very important feature: the overwhelmingly competitive price!

Now Palax focuses on consumers by launching the new PALAX ACTIVE. Despite its compact size, this powerhouse ensures that the production of firewood is easy and convenient. Although its external dimensions are small, the machine's solid structure and safety of operation have not been ignored.

This compelling machine is easy-going and effortless to use. And thanks to its fully opening protective net, the PALAX ACTIVE is quick and easy to service. Distinguished from its competitors, this reliable and versatile machine is also equipped with a hydraulically-driven feed roller, which considerably reduces the effort required for handling logs. And the crosscut handle having a lateral motion instead of the traditional up-down motion, means that the operating ergonomics of the machine are excellent.

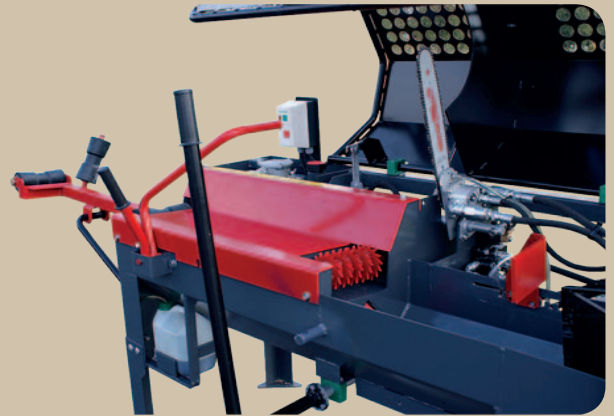

To help take the machine right where it is needed most, this handy unit can also be equipped with a transport platform for off-road use or for use on public roads.



We reserve the right to make changes

PALAX ACTIVE TECHNICAL SPECIFICATIONS

Feature: X = standard L = optional, 0 = not available

TR/TR **TR/OHD** **SM**
4kW 400V **PM**
Honda 13hp

HYDRAULICS

Separate hydraulics	0	X	X	X
External hydraulics (TR, mini loader etc.)	X	0	0	0
Hydraulic oil VGA 32, 25 litres	0	X	X	X
Splitting cylinder 4 tons	X	X	X	X

CUTTING AND SPLITTING

13" saw-bar/ chain	X	X	X	X
Hydraulic transmission for chain-saw	X	X	X	X
Automatic lubrication of saw-chain	X	X	X	X
Log-clamp	X	X	X	X
Adjustment of cutting length	X	X	X	X
Automatic splitting of log	X	X	X	X
Splitting wedge 0/2	X	X	X	X
Splitting wedge 2/4	L	L	L	L
Height adjustment of splitting wedge (2/4 wedge)	X	X	X	X

CONVEYORS

Hydraulic feed roller for log	X	X	X	X
Outtake trough for firewood	X	X	X	X
Hydraulic discharge conveyor	L	L	L	L

MAXIMUM DIMENSIONS OF THE LOG

Max. diameter of the log (cm)	27	27	27	27
Cutting length of the log (cm)	25-40	25-40	25-40	25-40

SPLITTING SPEED

	3-6 sec.	4 sec.	4 sec.	4 sec.
--	----------	--------	--------	--------

DIMENSIONS AND WEIGHT IN TRANSPORT POSITION

Length including outtake trough (mm)	2200	2200	2200	2200
Length including conveyor (mm)	2300	2300	2300	2300
Width (mm)	765	765	765	900
Height (mm)	1335	1335	1335	1335
Height including conveyor (mm)	1605	1605	1605	1605
Weight without conveyor (weight of the conveyor 75 kg)	382	395	407	409

OPTIONAL EQUIPMENT

Hydraulic discharge conveyor 2.6 m	L	L	L	L
Three-point hitch for tractor	X	X	L	0
Adapter for mini loader	L	L	L	0
Mobile outfit/off-road use	0	0	L	L
Mobile outfit/on-road use, registered (only in Finland)	0	0	L	L

Manufacturer:

PALAX®

YLISTARON TERÄSTAKOMO OY
Lahdentie 9, FI-61400 YLISTARO
Tel. +358 6 474 5100 Fax +358 6 474 0790
www.palax.fi

Sales:



Hakmet Ltée/Ltd.

41 rue du Moulin, Grenville, Québec, Canada J0V 1J0
Tel: 819-242-2400 • 1-800-361-2288 • Fax: 819-242-4066
hakmet@hakmet.com • www.hakmet.com